4. Size Considerations

4.1 Single Shade (For Sheer/Light Filtering/Room Darkening/Whispers Fabric)

Lift Systems	Width		Height		Max. Area
	Min	Max	Min	Max	
SmartRise™ Cordless	280mm[5]	2500mm	250mm	2400mm[4]	5.5 SQM
Cordless TDBU	380mm[6]				5.5 SQM
Cordless Day & Night					
SmartFit™ Bottom Up	220mm	1820mm	150mm	2438mm	4 SQM
SmartFit™	220mm	1800mm[1]	150mm	2200mm	4 SQM[2]
SmartFit™ for Sloped Windows	220mm	1500mm	150mm	3000mm	4.5 SQM
SmartFit™ Day & Night (25mm S)	220mm	1270mm	310mm	2200mm	2.6 SQM[2]
SmartFit™ Day & Night (45mm S, 45mm D, 62mm S, and 62mm Double)	220mm	1800mm	310mm	2200mm	4 SQM
SmartFit Plus (25mm S)	260mm	1300mm	150mm	2180mm	2.9 SQM
SmartFit Plus (45mm S & 45mm D)	260mm	1860mm	150mm	2180mm	4 SQM
Cord Loop & SmartRelease ™ Cord Loop	380mm	3000mm	250mm	3600mm	7.5 SQM
Cord Loop Top Down	610mm[3]				
Cord Loop Day & Night					
Corded	220mm	2500mm			5.5 SQM
Corded TDBU					
Corded Day & Night					
Patio Door Vertical	750mm	3700mm	600mm	3000mm	11.1 SQM
Patio Door Vertical Day & Night					

1. Maximum width is 1270mm for SmartFit™ Model A on 25mm single cell.
2. Maximum area is 2.6 SQM for SmartFit™ Model A on 25mm single cell.
3. Minimum width for height greater than 1828mm is 770mm.
4. Maximum height is 2200mm for 25mm single cell.
5. Minimum width for height greater than 2200mm is 570mm.
6. Minimum width for height greater than 2200mm is 800mm.

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

Max Frame to Frame Size for Decoflex™ (SmartFit™ with Frame) & Decoflex™ Day & Night (SmartFit™ Day & Night with Frame) & Decoflex™ for Skylights (SmartFit™ for Sloped Windows with Frame):

DecoFlex												
Frame Type	Frame Thickness (x2)	T - Post Thickness	Frame to Frame Width								Frame to Frame Height	
			No T-Post (1 Shade)		1 x T-Post (2 Shades)		2 x T-Post (3 Shades)		3 x T-Post (4 Shades)		Min. (mm)	Max. (mm)
			Min. (mm)	Max. (mm)	Min. (mm)	Max. (mm)	Min. (mm)	Max. (mm)	Min. (mm)	Max. (mm)		
L Frame / Hang Strip	22.2mm	25.4mm	270	1845	520	3675	770	5505	1020	7330	195	2240
Z Frame	22.2mm	25.4mm	270	1845	520	3675	770	5505	1020	7330	195	2240
50mm Deco Frame	50.8mm	25.4mm	330	1905	580	3730	830	5560	1080	7390	255	2300
76mm Deco Frame	76.2mm	25.4mm	380	1955	630	3780	880	5610	1130	7440	305	2350

DecoFlex Day & Night												
Frame Type	Frame Thickness (x2)	T - Post Thickness	Frame to Frame Width								Frame to Frame Height	
			No T-Post (1 Shade)		1 x T-Post (2 Shades)		2 x T-Post (3 Shades)		3 x T-Post (4 Shades)		Min. (mm)	Max. (mm)
			Min. (mm)	Max. (mm)	Min. (mm)	Max. (mm)	Min. (mm)	Max. (mm)	Min. (mm)	Max. (mm)		
L Frame / Hang Strip	22.2mm	25.4mm	270	1315	520	2615	770	3915	1020	5210	355	2240
Z Frame	22.2mm	25.4mm	270	1315	520	2615	770	3915	1020	5210	355	2240
50mm Deco Frame	50.8mm	25.4mm	330	1375	580	2670	830	3970	1080	5270	415	2300
76mm Deco Frame	76.2mm	25.4mm	380	1425	630	2720	880	4020	1130	5320	465	2350

DecoFlex For Skylights												
Frame Type	Frame Thickness (x2)	T - Post Thickness	Frame to Frame Width								Frame to Frame Height	
			No T-Post (1 Shade)		1 x T-Post (2 Shades)		2 x T-Post (3 Shades)		3 x T-Post (4 Shades)		Min. (mm)	Max. (mm)
			Min. (mm)	Max. (mm)	Min. (mm)	Max. (mm)	Min. (mm)	Max. (mm)	Min. (mm)	Max. (mm)		
L Frame	22.2mm	25.4mm	270	1545	520	3075	770	4605	1020	6130	195	3040
Z Frame	22.2mm	25.4mm	270	1545	520	3075	770	4605	1020	6130	195	3040

*The above is max frame to frame width, and each shade size must within the SmartFit™/SmartFit™ Day & Night / SmartFit™ for Sloped Windows size limitation.

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

Single Shade for Breeze/Windsong/Ashton Fabric:

Lift Systems	Fabric	Width		Length		Max. Area
		Min	Max	Min	Max	
Woven Cordless	Breeze & Windsong & Ashton	400mm[1]	2100mm	260mm	2100mm	4.41 SQM
Woven Cordless TDBU		400mm[1]	1980mm	260mm	2100mm	4.16 SQM
Cord Loop & SmartRelease ™ Cord Loop	Windsong & Ashton	380mm	2100mm	260mm	2100mm	4.41 SQM
Cord Loop TD		610mm[2]	2100mm	260mm	2100mm	4.41 SQM
Cord Loop Day & Night		610mm[2]	2100mm	260mm	2100mm	4.41 SQM
SmartFit™	Windsong	220mm	1800mm	150mm	2200mm	4 SQM
SmartFit™ Day & Night		220mm	1800mm	310mm	2200mm	4 SQM
SmartFit™	Ashton	220mm	1270mm	150mm	2200mm	2.77 SQM
SmartFit™ Day & Night		220mm	1270mm	310mm	2200mm	2.77 SQM

1. For shades less than 485mm in width, the maximum height available is 1570mm.
2. For shades over 1828mm in height, the minimum width available is 770mm.
3. Ashton is not available in Cord Loop Day & Night.

Single Shade for Solus Fabric:

Lift Systems	Width		Height		Max. Area
	Min	Max	Min	Max	
SmartRise™ Cordless	400mm[2]	2500mm	250mm	2400mm	5.5 SQM
Cordless TDBU	400mm[3]				
Cordless Day & Night					
SmartFit™	220mm	1800mm	150mm	2200mm	4 SQM
SmartFit™ Day & Night	220mm	1800mm	310mm	2200mm	4 SQM
SmartFit Plus	260mm	1860mm	150mm	2180mm	4 SQM
Cord Loop & SmartRelease ™ Cord Loop	380mm	3000mm	250mm	3600mm	7.5 SQM
Cord Loop Top Down	610mm[1]				
Cord Loop Day & Night					
Corded	220mm	2500mm			5.5 SQM
Corded TDBU					
Corded Day & Night					

1. For shades over 1828mm in height, the minimum width available is 770mm.
2. Minimum width for height greater than 2200mm is 570mm.
3. Minimum width for height greater than 2200mm is 800mm.

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

Single Shade for Flame Resistant Fabrics:

Lift Systems	Width		Height		Max. Area
	Min	Max	Min	Max	
SmartRise™ Cordless	635mm	2500mm	250mm	2400mm[5]	5.5 SQM
Cordless TDBU	635mm[6]				
SmartFit™ Bottom Up	220mm	1820mm	150mm	2438mm	3.3 SQM
SmartFit™	220mm	1800mm[1]	150mm	2200mm	4 SQM[2]
SmartFit™ for Sloped Windows	220mm	1500mm	150mm	3000mm	4.5 SQM
SmartFit Plus (25mm S)	260mm	1300mm	150mm	2180mm	2.9 SQM
SmartFit Plus (45mm S)	260mm	1860mm	150mm	2180mm	4 SQM
Cord Loop & SmartRelease™ Cord Loop	380mm	3000mm	250mm	3600mm	7.5 SQM
Cord Loop Top Down	610mm[3]				
Corded	220mm	2500mm			5.5 SQM
Corded TDBU					
Patio Door Vertical	750mm	3700mm	600mm	3000mm[4]	11.1 SQM

1. Maximum width is 1270mm for SmartFit™ Model A on 25mm single cell.
2. Maximum area is 2.6 SQM for SmartFit™ Model A on 25mm single cell.
3. For shades over 1828mm in height, the minimum width available is 770mm.
4. For 45mm Flame Resistant RD fabric the max. height for Patio Door Vertical is 2400mm.
5. Maximum height is 2200mm for 25mm single cell.
6. Minimum width for height greater than 2200mm is 800mm.

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

4.2 Specialty Shapes

Specialty Shapes	Width		Height	
	Min	Max	Min	Max
Perfect Arch	260mm	2430mm	130mm	1210mm
Eyebrow	260mm	2430mm	130mm	1210mm
Elongated Eyebrow	305mm	2430mm	153mm	1210mm
Quarter Round (L or R)	130mm	1210mm	130mm	1210mm
Arch on Top (L or R)	153mm	1210mm	153mm	1210mm
Angle Top (L or R)	130mm	1210mm	130mm	1210mm
Triangle	260mm	2430mm	130mm	1210mm
Half Eyebrow (L or R)	130mm	1210mm	130mm	1210mm

* Above size is net size not order size

*** The shade width & Height must be within the size limitation listed above.**

Note:

1. Perfect Arches: height must equal to half of width
2. Elongated Eyebrows:

*Two leg heights must equal.
*The difference between shade height and leg height must be 127mm or more.
*Leg height needs to be 26mm or more.
* Difference between shade height and leg height must be less than half of shade width.

3. For Arch on Top:

*Difference between shade height and leg height must be less than shade width.
*The difference between shade height and leg height must be 127mm or more.
*Leg height needs to be 26mm or more.

4. Quarter Rounds' width and height must equal.
5. For Angle Tops: The width can be in different size from height as long as the width and height are within size limitation
6. For Eyebrows:

*Shade height must be less than ½ of the shade width

7. For Half Eyebrows:

*Shade height must be less than the shade width

8. Inside mount & symmetrical shapes only; we do not accept templates.
9. Non-operable shades only

Note: Please note that templates need not be sent and will not be used as we produce perfect shapes only for this system.

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

4.3 Two Shades on One Headrail - 2 on 1

For Cellular Fabric: (LF/ RD/ Sheer/ Whispers/ Solus/ Flame Resistant)

Lift Systems		Fabric Type	Min. Size	Max. Size	Max. Area
SmartRise™ Cordless	Shade Width	LF/ RD/ Sheer/ Whispers	590mm[b]	3000mm	5.5 SQM per shade
	Shade Height		250mm	2400mm[a]	
	Shade Width	Solus	810mm[b]	3000mm	
	Shade Height		250mm	2400mm	
	Shade Width	Flame Resistant	1280mm	3000mm	
	Shade Height		250mm	2400mm[a]	
Cord Loop (*not available for SmartRelease™ Cord Loop)	Shade Width	LF/ RD/ Sheer/ Whispers/ Solus/ Flame Resistant	770mm	3000mm	7.5 SQM per shade
	Shade Height		250mm	3600mm	
Corded	Shade Width	LF/ RD/ Sheer/ Whispers/ Solus/ Flame Resistant	450mm	3000mm	5.5 SQM per shade
	Shade Height		250mm	3600mm	

1. The gap between each shade will be 6.4mm.
2. Each shade must follow size limitation of single shade.

a. Maximum height is 2200mm for 25mm single cell.

b. Minimum width for height greater than 2200mm is 1170mm.

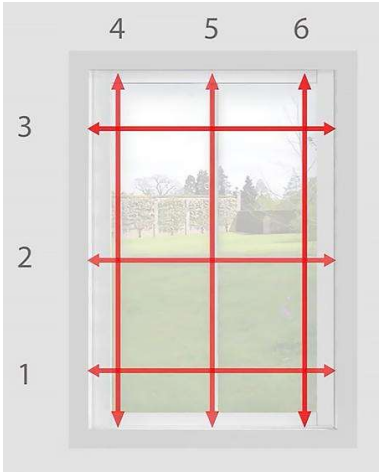
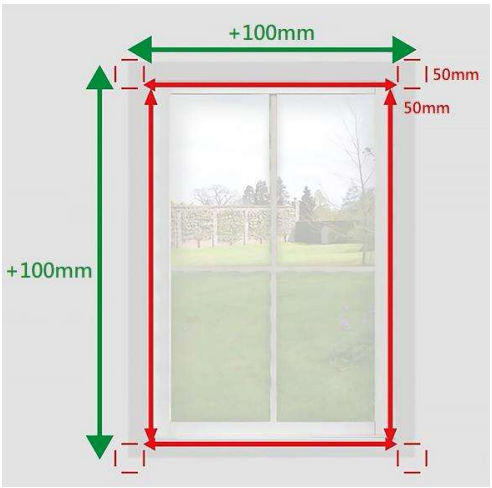
For Breeze/ Windsong/Ashton Fabric:

Lift Systems		Min. Size	Max. Size	Max. Area
Woven Cordless (Breeze, Windsong & Ashton)	Shade Width	810mm	3000mm	4.41 SQM per shade
	Shade Height	260mm	2100mm	
Cord Loop (Windsong & Ashton)	Shade Width	770mm	3000mm	4.41 SQM per shade
	Shade Height	250mm	2100mm	

1. The gap between each shade will be 6.4mm.
2. Each shade must follow size limitation of single shade.
3. For 2 on 1 Woven Cordless, the shade width smaller than 485mm, the maximum shade length is 1570mm.

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

4.4 Order Size Definition

	Inside Mount (IM)	Outside Mount (OM)
Mounting Position	Blind fits within window opening	Blind overlaps window opening
Order Size	**Window Opening Size**: Provide the smallest width measurement among top, middle and bottom measurement. Top measurement is critical because the headrail must fit. Measure the height among left, center and right and provide the smallest height. 	**Net Size**: Measure the desired width and height. To minimize light leakage, it is recommended that the blind should overlap the window opening at least 50mm on each side and at the top & bottom. 

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

Norman Australia Honeycomb Shade Program Binder				
Approver		**Custom Made Honeycomb Shade (Non-Motorisation)**	Code	P-HC-0126
			Edition	AX
Reviewer	Selina Chen		Page	24/71
Compiler	Orange Zeng		Date	15.07.2026

Product	Mounting	Shade Width(X)			Shade Height(Y)			Light guard length
		Order Width	Measurement	Tolerance	Order Height	Measurement	Tolerance	
SmartRise™ Cordless / Cordless TDBU/ Cordless Day & Night/ Woven Cordless/ Woven Cordless TDBU	Out(MFF) In(MFF)	X=Order Width	Measure from left of blanket/end cap to right of blanket/end cap	±3.2mm	Y=Order Height	Measure from the top of head rail to the bottom of bottom rail when the shade is fully extended along the straight cords. For Corded, the transparent bead must be at the top position against the cord lock.	+12.7mm~ +76.2mm	**Order Height-3mm
	In (WS)	*Please see below note 3			Y=Order Height			
Cord Loop/ SmartRelease™ Cord Loop	Out(MFF) In(MFF)	X=Order Width		±3.2mm	Y=Order Height		+5mm~ +10mm	**Order Height-3mm
	In (WS)	*Please see below note 3			Y=Order Height			
Cord Loop Top Down / Cord Loop Day & Night	Out(MFF) In(MFF)	X=Order Width		±3.2mm	Y=Order Height		±3.2mm	**Order Height - 3mm
	In (WS)	*Please see below note 3			Y=Order Height			
Corded/ Corded TDBU/ Corded Day & Night	Out(MFF) In(MFF)	X=Order Width		±3.2mm	Y=Order Height		+2mm~ + 7mm	**Order Height-3mm
	In (WS)	*Please see below note 3			Y=Order Height			
SmartFit™ Bottom Up /SmartFit™/ SmartFit™ for Sloped Windows	Out(MFF) In(MFF)	X=Order Width		±3.2mm	Y=Order Height		Cords can be adjusted a bit to better fit your window in height	**Order Height
	In (WS)	*Please see below note 3						
SmartFit™ Day & Night	Out(MFF) In(MFF)	X=Order Width	Measure from left of end cap to right of end cap (the blanket is 3mm away from the end cap at both ends)	±3.2mm	Y=Order Height			
	In (WS)	*Please see below note 4						
SmartFit Plus	Out(MFF) In(MFF)	X=Order Width	*Please see below note 8	±3.2mm	Y=Order Height	*Please see below note 8		**Order Width -31mm
	In (WS)	X=Order Width			Y=Order Height-1.6mm			
Patio Door Vertical/ Patio Door Vertical Day & Night	Out(MFF)	X= Order Width	Measure from the left end cap to the right end cap along the head rail	±3.2mm	Y=Order Height – 13mm	Measure from the top of head rail to the bottom of vertical rail end cap	±3.2mm	N/A
	In (WS)	X=Order Width -4.8mm			Y=Order Height-16mm			N/A

Notes:

****All size limitations are in NET width, and above deduction needs to be added for order size if applicable.****

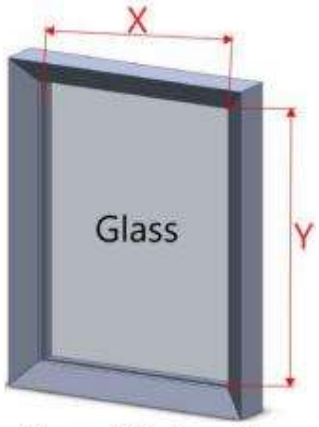
1. Out (MFF) & In (MFF): No deduction will be made, finished product size will be the same as the order size
   In (WS): Deduction will be made by the factory. Please refer to above chart for standard deduction.
   **** Light guard is only available for In (MFF) & In (WS) except for SmartFit Plus.**
2. For Patio Door Vertical & Patio Door Vertical Day & Night: add 100mm to opening width and 50mm to opening height (Suggested addition for OM). For all other system, it is suggested to add at least 100mm overlap to both opening width and opening height.
3. For Corded, Corded TDBU, Corded Day&Night, Cordless, Cordless TDBU, Cordless Day&Night, Cord Loop, SmartRelease™ Cord Loop, Cord Loop Top Down, Cord Loop Day & Night, Woven Cordless, Woven Cordless TDBU, SmartFit™ Bottom Up, SmartFit™, SmartFit™ for Sloped Windows,
   * Inside Mount:
   Shade Width (without light guard or without hold down bracket) = Order Width - 6mm
   Shade Width (with light guard or with hold down bracket) = Order Width – 9.5mm
   Shade Height = Order Height

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

4. For SmartFit™ Day & Night (Shade width is measured from left of end cap to right of end cap)
   * Inside Mount:
   Shade Width (without light guard or without hold down bracket) = Order Width - 4mm
   Shade Width (with light guard or with hold down bracket) = Order Width – 7.5mm
   Shade Height = Order Height
5. For Specialty Shapes: Inside mount deduction: 4.75mm/side. Tolerance: Shade width and height may vary -3.2mm ~3.2mm.
6. For cutout: All available systems except Vertical: Inside mount deduction: 4.75mm/side.
7. All above standard deductions (including the deduction for height of Vertical systems) will be made by the factory.
8. For SmartFit Plus

   Width: measure from left side channel to right side channel
   Height: measure from top of side channel to bottom of side channel

   *No pre-drilled holes on the side channels is default. When ordering without pre-drilled holes, please measure from the edge of the window glass. Refer to the illustration on the right.



No pre-drill hole on side channels measurement

Mounting Options:
- Standard with tapes(no pre-drill on side channels), optional with screws(pre-drill on side channels). Two way tapes must mount on smooth & clean glass surface.

* Please note that there are limitations and drawbacks to installing SmartFit Plus using two way tape. Our testing indicates that products up to 1300mm (25mm S) / 1860mm (45mm S & 45mm D) wide and 2180mm long can be installed using 3M VHB4905 tape on a smooth, clean glass surface.

5. Handle Quantity

For SmartRise™ Cordless / Woven Cordless

Shade Type	Shade Width (Order Size)	Handle
Single Shade	X<1300mm	1
Single Shade	X≧1300mm	2
2 On 1	Handle qty based on the width of each shade.	

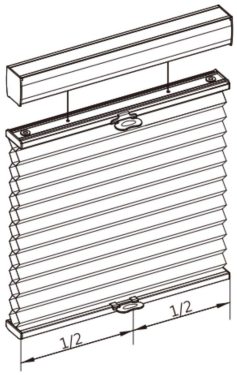
For Cordless TDBU/ Woven Cordless TDBU / Cordless Day & Night

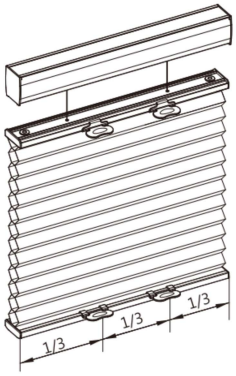
Shade Type	Shade Width (Order Size)	Handle
Single Shade	X<1300mm	2
Single Shade	X≧1300mm	4

* For SmartRise™ Cordless / Woven Cordless shade with only 1 handle provided (X<1300mm), the handle is always positioned on the center of bottom rail (on the center of middle/bottom rail for Cordless TDBU/ Cordless Day & Night /Woven Cordless TDBU).

*For SmartRise™ Cordless / Woven Cordless shade with 2 handles provided (X≧1300mm), the handles will be always evenly spaced on bottom rail (evenly spaced on the center of middle/bottom rail for Cordless TDBU/ Cordless Day & Night/ Woven Cordless TDBU).

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.





For SmartFit™ / SmartFit™ for Day & Night

Order Width (X)	Handle Qty#			
	25mm Single		45mm Single, 45mm Double, 62mm Double, 62mm Single	
	SmartFit™	SmartFit™ for Day & Night	SmartFit™	SmartFit™ for Day & Night
X≦1270mm	2	4	2	4
X>1270mm	4	N/A	4	8

For SmartFit Plus

Order Width (X)	Handle Qty#	
	25mm Single	45mm Single & 45mm Double
X≦1270mm	2	2
X>1270mm	2	4









For SmartFit™ for Sloped Windows / Decoflex™ for Skylights

Width	Handle
All Size	1






Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

6. Main Components

6.1 Headrail

NO	Cell Size					Lift System	Rail Drawing
	25mm Single	45mm Double	45mm Single	62mm Double	62mm Single		
1	√					Corded/ Corded Day & Night / SmartFit™ for Sloped Windows / SmartFit™ Bottom Up	
2		√	√			Corded/ Corded Day & Night	
3	√					Corded TDBU	
4		√	√				
5			√			Woven Cordless	
6					√		
7			√			Woven Cordless TDBU	
8					√		







Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

NO	Cell Size					Lift System	Rail Drawing
	25mm Single	45mm Double	45mm Single	62mm Double	62mm Single		
9	√					SmartRise™ Cordless	
10		√	√				
11				√	√	SmartRise™ Cordless / Cordless Day & Night	
12	√	√	√			Cordless TDBU	
13	√	√	√			Cordless Day & Night	






Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

Norman Australia Honeycomb Shade Program Binder


Approver		**Custom Made Honeycomb Shade (Non-Motorisation)**	Code	P-HC-0126
			Edition	AX
Reviewer	Selina Chen		Page	29/71
Compiler	Orange Zeng		Date	15.07.2026

NO	Cell Size					Lift System	Rail Drawing
	25mm Single	45mm Double	45mm Single	62mm Double	62mm Single		
14				√	√	Cordless TDBU	
15	√	√	√			Cord Loop Top Down	
16	√	√	√			Cord Loop/ SmartRelease™ Cord Loop / Cord Loop Day & Night	
17				√	√		
18				√	√	Cord Loop Top Down	
19			√		√	Patio Door Vertical	









Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

NO	Cell Size					Lift System	Rail Drawing
	25mm Single	45mm Double	45mm Single	62mm Double	62mm Single		
20	√					Specialty Shapes	
21		√	√				
22	√					SmartFit™ / SmartFit™ Day & Night / SmartFit Plus	
23		√	√			SmartFit™ / SmartFit™ Day & Night / SmartFit Plus	
24				√	√	SmartFit™ / SmartFit™ Day & Night	








6.2 Middle Rail & Bottom Rail & Vertical Rail

NO	Cell Size					Rail Type	Lift System	Rail Drawing
	25mm Single	45mm Double	45mm Single	62mm Double	62mm Single			
1	√					Middle Rail	Corded TDBU/ Cordless TDBU / Cord Loop Top Down	




Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

2		√	√			Middle Rail	Corded TDBU/ Cordless TDBU / Cord Loop Top Down	
3				√	√	Middle Rail	Cordless TDBU / Cord Loop Top Down	
4	√					Middle Rail	Corded Day & Night / Cordless Day & Night / Cord Loop Day & Night	
5		√	√			Middle Rail	Corded Day & Night / Cordless Day & Night / Cord Loop Day & Night	
6				√	√	Middle Rail	Cordless Day & Night / Cord Loop Day & Night	
7	√					Bottom Rail	Corded/Corded TDBU/Corded Day & Night/ SmartRise™ Cordless/Cordless TDBU/Cordless Day & Night/Cord Loop/SmartRelease™ Cord Loop/Cordloop Top Down/Cord Loop Day & Night	
8		√	√			Bottom Rail	Corded/Corded TDBU/Corded Day & Night/ SmartRise™ Cordless/Cordless TDBU/Cordless Day & Night/Cord Loop/SmartRelease™ Cord Loop/Cordloop Top Down/Cord Loop Day & Night	
9				√	√	Bottom Rail	SmartRise™ Cordless/Cordless TDBU/Cordless Day & Night/Cord Loop/SmartRelease™ Cord Loop/Cordloop Top Down/Cord Loop Day & Night	





Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

10			√			Middle Rail & Bottom Rail	For Woven Cordless/ Woven Cordless TDBU	
11					√			
12			√		√	Unmovable Rail	Patio Door Vertical	
13			√		√	Movable Rail	Patio Door Vertical	
14	√					Bottom Rail	SmartFit™ / SmartFit™ Day & Night / SmartFit Plus	
15		√	√			Bottom Rail	SmartFit™ / SmartFit™ Day & Night / SmartFit Plus	
16				√	√	Bottom Rail	SmartFit™ / SmartFit™ Day & Night	

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

17	√					Middle Rail	SmartFit™ for Sloped Windows	
18	√					Bottom Rail	SmartFit™ for Sloped Windows	
19	√					Bottom Rail	SmartFit™ Bottom Up	









6.3 Installation Bracket

NO	Cell Size					Lift System	Drawing
	25mm Single	45mm Double	45mm Single	62mm Double	62mm Single		
1	√					Corded/ Corded TDBU/ Corded Day & Night	 or (Running Change)
2		√	√				
3			√			Woven Cordless/ Woven Cordless TDBU	
4					√		





Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

Norman Australia Honeycomb Shade Program Binder


Approver		**Custom Made Honeycomb Shade (Non-Motorisation)**	Code	P-HC-0126
			Edition	AX
Reviewer	Selina Chen		Page	34/71
Compiler	Orange Zeng		Date	15.07.2026

NO	Cell Size					Lift System	Drawing
	25mm Single	45mm Double	45mm Single	62mm Double	62mm Single		
5	√					SmartRise™ Cordless	 or (Running Change)
6		√	√				
7				√	√	SmartRise™ Cordless/ Cordless TDBU/ Cordless Day & Night/ Cord Loop/ SmartRelease™ Cord Loop / Cord Loop Top Down /Cord Loop Day & Night	
8	√	√	√			Cordless TDBU/ Cordless Day & Night	 or (Running Change)
9	√	√	√			Cord Loop/ SmartRelease™ Cord Loop / Cord Loop Top Down /Cord Loop Day & Night	
10	√					SmartFit™ for Sloped Windows (For bottom rail) (OM)	
11	√	√	√			SmartFit™ / SmartFit™ Day & Night (OM)	
12	√					SmartFit™ Bottom Up	

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

NO	Cell Size					Lift System	Drawing
	25mm Single	45mm Double	45mm Single	62mm Double	62mm Single		
13	√					SmartFit™ Bottom Up / SmartFit™ for Sloped Windows (For head rail)	 or (Running Change)
14	√					SmartFit™ for Sloped Windows (For bottom rail)	
15			√		√	Patio Door Vertical	
16	√					Specialty Shapes	
17		√	√				

6.4 Blanket

NO	Cell Size	Drawing
1	25mm Single Cell Sheer/ 45mm Single Cell Sheer/ 62mm Single Cell Sheer	
2	25mm Single Cell Blanket/ 45mm Single Cell Blanket (including Breeze & Windsong)/ 62mm Single Cell Blanket (including Breeze & Windsong)	
3	45mm Double Cell Blanket/ 62mm Double Cell Blanket	

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.